


betonstaal


netten

leveringsvoorwaarden: NEN 6008

toleranties: NEN 6008

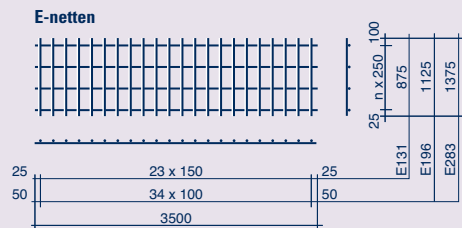


K-L-G-Z-netten

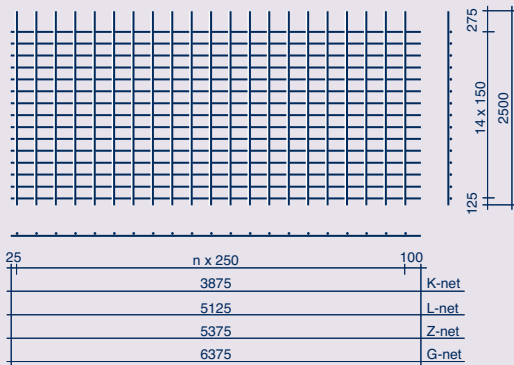

E-netten

K-L-G-Z-netten






merk	A mm ² /m	G ₈ kg/net	hoofdwap. mm	verdeelwap. mm	ℓ mm	b mm
E131	131	5,39	5 -150	5-250	3500	875
E196	196	8,76	5 -100	5-250	3500	1125
E283	283	13,9	6 -100	5-250	3500	1375
K189	189	19,1	6 -150	5-250	3875	2500
K257	257	23,7	7 -150	5-250	3875	2500
K295	295	26,3	7,5 -150	5-250	3875	2500
K335	335	29,1	8 -150	5-250	3875	2500
K424	424	36,5	9 -150	5,5-250	3875	2500
K524	524	44,7	10 -150	6-250	3875	2500
K634	634	53,8	11 -150	6,5-250	3875	2500
K754	754	63,7	12 -150	7-250	3875	2500
L189	189	25,2	6 -150	5-250	5125	2500
L295	295	34,8	7,7 -150	5-250	5125	2500
L378	378	42,3	8,5 -150	5-250	5125	2500
L524	524	59,1	10 -150	6-250	5125	2500
L754	754	84,1	12 -150	7-250	5125	2500
G295	295	43,2	7,5 -150	5-250	6375	2500
G335	335	47,8	8 -150	5-250	6375	2500
G424	424	60,0	9 -150	5,5-250	6375	2500
G524	524	73,4	10 -150	6-250	6375	2500
G754	754	105	12 -150	7-250	6375	2500
Z257	257	32,8	7 -150	5-250	5375	2500
Z335	335	40,3	8 -150	5-250	5375	2500
Z424	424	50,5	9 -150	6-250	5375	2500

betonstaal**netten**

leveringsvoorwaarden: NEN 6008

toleranties: NEN 6008

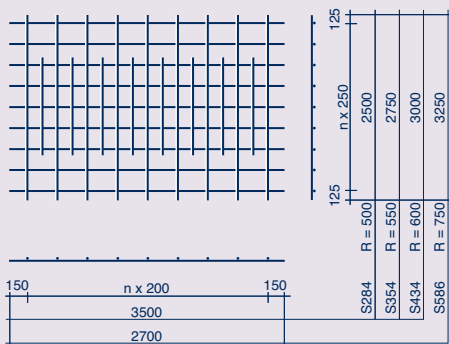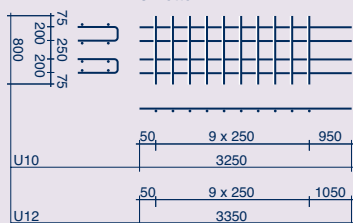S-netten**U-netten****S-netten****U-netten****P-netten**

merk	A mm ² /m	G ₈ kg/net	hoofdwap. mm	verdeelwap. mm	ℓ mm	b mm
S284	284	20,7	8,5-200	5-250	3500	2500
S354	354	28,3	10 -200	6-250	3500	2750
S434	434	28,8	11 -200	6-250	3500	3000
S566	566	40,1	12 -200	7-250	2700	3250
U10	10	9,8	10 -200	6-250	3250	800
U12	12	14,3	12 -200	7-250	3350	800
P50	50	22,2	3 - 50	3- 50	5000	2000
P79	79	12,3	5 -250	5-250	5000	2000
P98	98	15,4	5 -200	5-200	5000	2000
P131	131	20,2	5 -150	5-150	5000	2000
P141	141	22,2	6 -200	6-200	5000	2000
P189	189	29,1	6 -150	6-150	5000	2000
P196	196	30,8	5 -100	5-100	5000	2000
P251	251	39,5	8 -200	8-200	5000	2000
P257	257	39,6	7 -150	7-150	5000	2000
P262	262	41,4	5 - 75	5- 75	5000	2000
P283	283	44,4	6 -100	6-100	5000	2000
P335	335	51,8	8 -150	8-150	5000	2000
P503	503	79,0	8 -100	8-100	5000	2000
P524	524	80,9	10 -150	10-150	5000	2000
P754	754	116	12 -150	12-150	5000	2000
P784	784	123	10 -100	10-100	5000	2000


betonstaal

netten


leveringsvoorwaarden: NEN 6008

toleranties: NEN 6008

W-netten

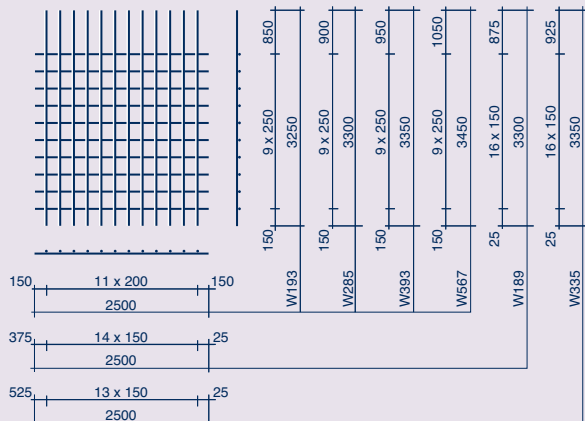


B-netten

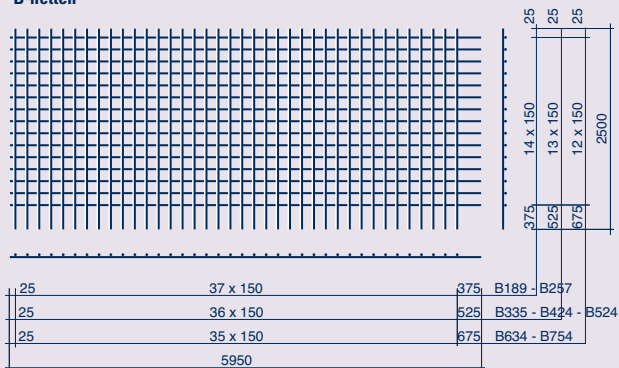

W-netten

B-netten



merk	A mm ² /m	G ₈ kg/net	hoofdwap. mm	verdeelwap. mm	ℓ mm	b mm
W189	189	20,4	6-150	6-150	3300	2500
W193	193	15,6	7-200	5-250	3250	2500
W285	285	21,5	9-200	5-250	3300	2500
W335	335	35,3	8-150	8-150	3350	2500
W393	393	30,4	10-200	6-250	3350	2500
W567	567	44,3	12-200	7-250	3450	2500

B189	189	40,9	6-150	6-150	5950	2500
B257	257	55,6	7-150	7-150	5950	2500
B335	335	69,4	8-150	8-150	5950	2500
B424	424	87,7	9-150	9-150	5950	2500
B503	503	105	8-150	8-150	6000	2500
B524	524	108	10-150	10-150	5950	2500
B634	634	125	11-150	11-150	5950	2500
B754	754	149	12-150	12-150	5950	2500



betonstaal

netten


leveringsvoorwaarden: NEN 6008

toleranties: NEN 6008

stek-netten

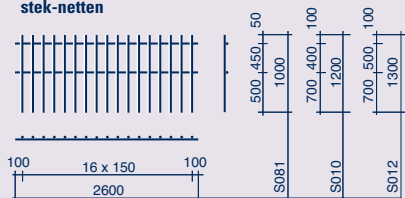


V-netten

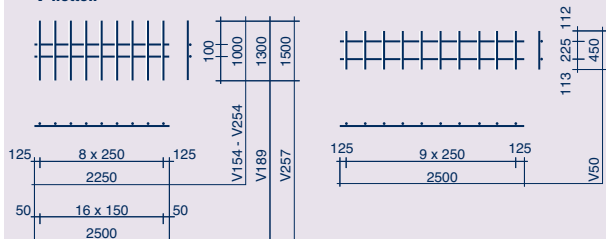

stek-netten

V-netten



merk	A mm ² /m	G kg/net	hoofdwap. mm	verdeelwap. mm	ℓ mm	b mm
stek010	10	13,7	6-400	10-150	2600	1200
stek012	12	21,2	7-500	12-150	2600	1300
stek081	81	7,52	5-450	8-150	2600	1000
stek082	82	7,52	5-50	8-150	2600	1000
V50	50	1,46	5-250	5-225	2500	450
V154	154	3,41	7-250	5-100	2250	1000
V189	189	5,68	6-150	5-100	2500	1300
V254	254	5,49	9-250	6-100	2250	1000
V257	257	8,47	7-150	5-100	2500	1500